


# Bridon®

NEW


## Dyform 36LR PI+



Dyform 36LR Pi + is a high performance compacted multi-layer constructed rope which incorporates an engineered extruded plastic that spreads between the 18 outer strands and the rope core .

- ✓ Outstanding bending fatigue performance
- ✓ Very stable rope construction
- ✓ Ideal for foundation-making equipment and deck cranes

Diameter	Nominal Length Mass	MBF	
		1960	2160
mm	kg/m	kN	kN
10	0.520	92.6	95
11	0.634	111	115
12	0.739	133	137
12.7	0.831	149	153
13	0.870	156	161
14	1.01	181	191
15	1.16	208	214
16	1.31	235	251
17	1.48	267	275
18	1.66	300	317
19	1.85	335	354
20	2.05	370	393
21	2.26	408	420
22	2.47	450	475
22.2	2.47	456	482
23	2.71	481	504
24	2.95	533	565
25	3.20	578	595
25.4	3.30	597	623
26	3.46	625	660
28	4.01	725	765
28.6	4.18	760	795
30	4.60	850	877
32	5.24	967	1005
34	6.00	1095	1135
36	6.73	1180	1275
38	7.50	1365	1420
40	8.30	1450	1570
42	9.15	1600	1730
44	10.05	1750	1855
46	10.94	1920	2010
48	12.0	2090	2170
50	13.0	2270	2355
52	13.9	2450	2570

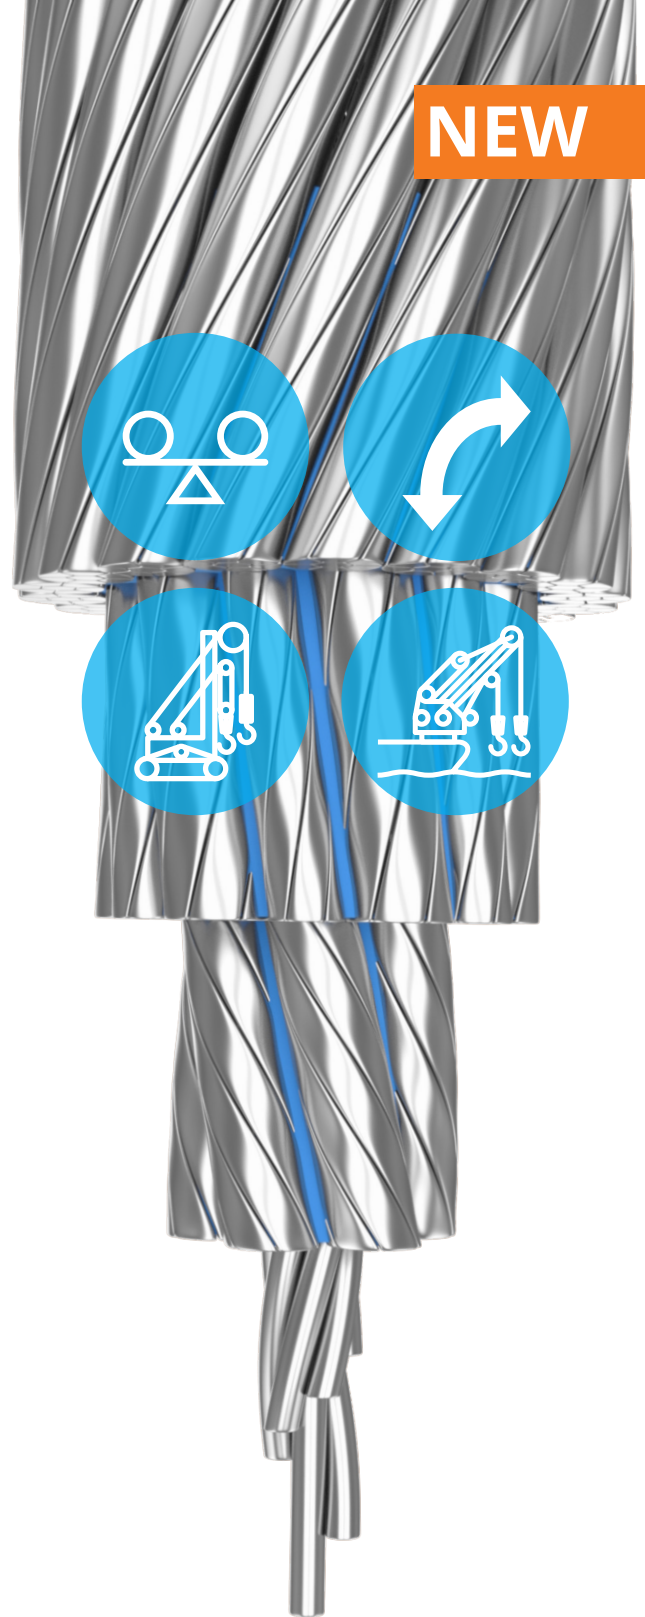

The tables are for guidance purposes only with no guarantee or warranty (express or implied) as to its accuracy. The products described may be subject to change without notice, and should not be relied on without further advice from Bridon-Bekaert. The cross section image is for reference only. Actual cross sections vary due to diameter. Visit [www.bridon-bekaert.com](http://www.bridon-bekaert.com) for the most up-to-date data.